

**QUALITY BRASS BODY MANUFACTURING**

Brass body poured not forged & manufactured in New Zealand. Mini body design to enable easy installation.




**INTERCHANGEABLE SPARE PARTS**

All spare parts can be used on either brass or plastic valves.



**LONG & SHORT BRASS ARM OPTIONS**

D2 Grade & held in with Stainless Steel split pin.  
Long Arm = 330mm  
Short Arm = 202mm



**MATERIALS APPROVED FOR DRINKING WATER**

All plastic parts used in the manufacturing of Super-Flo valves have been approved for use with potable water.




**MAXIMUM WORKING PRESSURE**

12 Bar (174 psi) @ 20°C

**MALE ADAPTORS**

O-Ring seal short & long adaptors available in 15-50mm (1/2" - 2"). Manufactured from High Quality Glass Fibre Reinforced Nylon for a weather, termite, fungi & bacteria resistance.

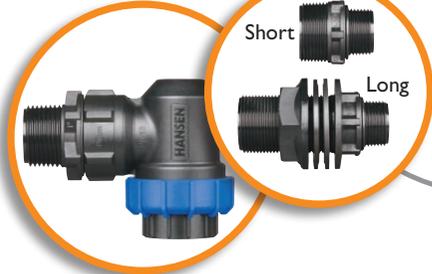

**30% BIGGER BODY FOR GREATER FLOWS**



Note: Floats not included and available as a separate accessory



**HAND TESTED**  
All Hansen Super-Flo Valves are rigorously hand tested

Store Packaging



**HIGH FLOW RATE**  
29 PSI, 188L/PM




**STRONG LONG LIFE SEAL**  
Versatile, Tuff, Double Sided Urethane Seals.

**HELP ELIMINATE VALVE STICKING**  
Patent Pending Slipper Fit Piston designed to reduce valve sticking and tuned to eliminate turbulence, improving flow characteristics.




**FEMALE BODY CAP**  
Use to supply portable troughs, washdowns, irrigation systems and other applications.

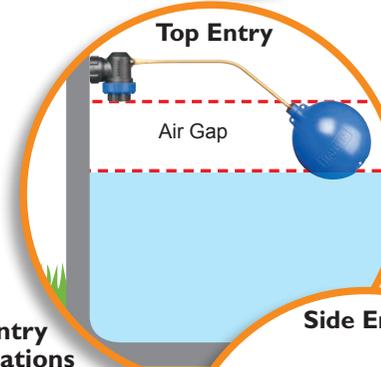

**Top Entry Installations**  
Put thread tape on adaptor side that does not have O-ring and start the adaptor into trough inlet. Thread Super-Flo Valve onto adaptor & tighten. Screw the float on to the brass arm. Hold the body of the valve at arm entry point. Bend brass arm to achieve the correct on/off and water level.

**SUITED TO TOP OR SIDE ENTRY**

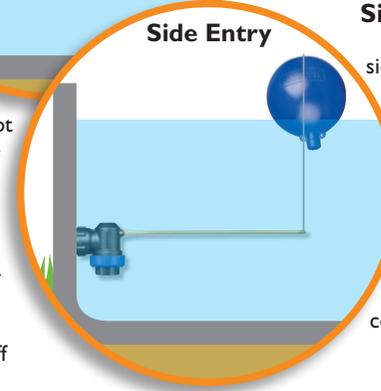

**Side Entry Installations**  
Put thread tape on adaptor side that does not have O-ring and start the adaptor into trough inlet. Thread Super-Flo Valve onto adaptor & tighten. Screw the nut with cord onto the Super-Flo Brass arm. Thread cord through the Super-Flo float. Tie the cord off to achieve the correct on/off and water level. Note: Cord and nuts only supplied with long arm valve.



*Super-Flo Valves*

**Reliable High Performance Trough Valve**

[www.hansenproducts.com](http://www.hansenproducts.com)