


## MALE ADAPTORS

O-Ring seal short and long adaptors available in 15-50mm (1/2" - 2"). Manufactured from High Quality Glass Fibre Reinforced Nylon for a weather, termite, fungi & bacteria resistance.

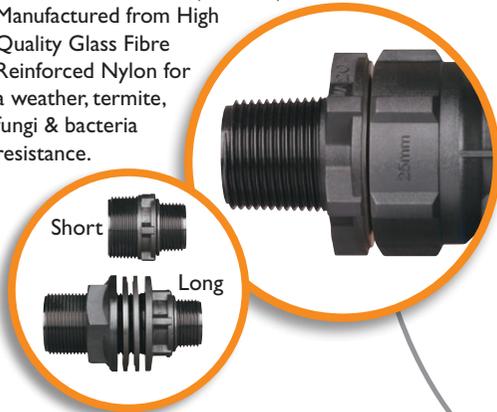

## REVERSIBLE SEAL

Reversible seal effectively doubles the valves life.



## STRONG LONG LIFE SEAL

Versatile, Tough, Double Sided Urethane Seal.



Store Packaging


## ULTRA COMPACT!

Ideal for very confined spaces the Hansen Mini Fast~Flo valve is well suited to trough/tank environments that demand a compact sized valve.



## Top Entry Installations

Thread O-Ring end of correct size Long Tail Adaptor into Mini Fast~Flo Valve Body and tighten firmly enough that the O-Ring creates a seal against the Mini Fast~Flo Valve Body face. Do not over tighten. Place the rubber washer on the long tail adaptor with ribs facing out so that the sealing surface is against the trough/tank wall when adaptor is put through inlet hole. On the outside, place the Poly (hard) Washer on the Long Tail Adaptor with the ribs facing the trough/tank wall. Thread on Adaptor Nut and tighten firmly. Do not over tighten. Screw the Mini Fast~Flo Float onto the Arm and use the Ezy Clamp to move the float to desired position for a water level that suits your requirements.

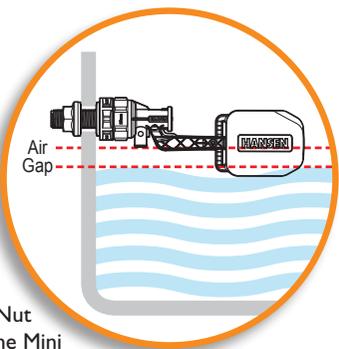

## HANSEN EZI CLAMP ARM LEVEL ADJUSTMENT

Hansen Mini Fast~Flo Valves feature a Hansen Ezi Clamp arm allowing the 70mm float to be moved up or down making level adjustment a breeze



**HAND TESTED**  
All Hansen Mini Fast~Flo Valves are rigorously hand tested.

## FLOW RATE

29 PSI, 9L/PM



## ANTI-SYPHON HOLES

When the valve body outlet is submerged in water or has an extension outlet tube attached, the Anti-Syphon Holes have been designed to be knocked out to prevent the valve from back flowing as long as the Anti-Syphon Holes are above water level.

## HOSE BARB OUTLET

Acts as a diffuser for quiet operation and controlling the outlets flow in confined spaces



## MATERIALS APPROVED FOR DRINKING WATER

All plastic parts used in the manufacturing of Mini Fast~Flo valves have been approved for use with potable water.

**MAXIMUM WORKING PRESSURE**  
12 Bar (174 psi) @ 20°C

**HANSEN™**

*mini* Fast~Flo Valves

**A Reliable, Ultra Compact Trough/Tank Valve**

[www.hansenproducts.com](http://www.hansenproducts.com)